TERMINATION LOAD

STC-LOAD-50W-4G

Frequency: 340-2700 MHz | **Input Power :** 50W | **PIM:** ≦ -160dBc @2x20W | **Connector:** (4.3-10) M|
Environment : IP68 (Indoor or Outdoor)

Terminations or loads, are matched to 50 ohms characteristic impedance. They are designed to absorb all the incident power with very little reflection, effectively terminating the line or port in its characteristic impedance.

KEY FEATURES

- Low VSWR
- Qualified PIM of <-160 dBc@2x20W Carriers
- High reliability
- Compact and light weight therefore easy to install

Specifications	
Frequency Range	340-2700 MHz
Return Loss	≥21 Db
PIM3	≤-160 dBc @2x40 W
Impedance	50 Ω
Connector	4.3-10 // Male
Input Power	50 W
Mechanical	
Temperature	-45 to +65℃
Dimensions	176x176x69.5 mm
Weight	3.6 kg
Operational Humidity	5%~95%
Ingress Protection	IP68 (Indoor and Outdoor)
Warranty / Mounting	
1 year / Pole or wall mounting	
Product Outline	

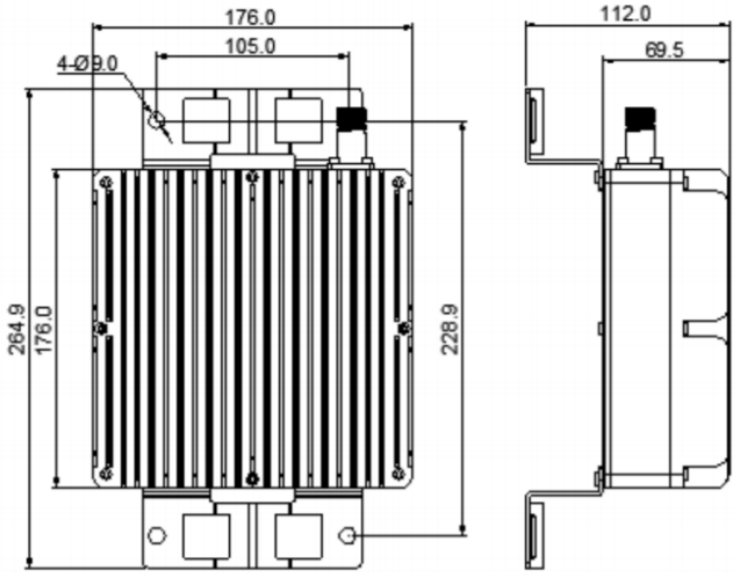

Disclaimer: All images are for reference purposes only

Revised | Sept 2020 (V1)

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

SATELCOM TELEKOMÜNİKASYON
BİLGİ VE İLETİŞİM TEKNOLOJİLERİ İTHALAT İHRACAT SANAYİ AŞ.
BÜDOTEK Teknopark, Dudullu OSB Mah. Des 2.Cad. No:8/25 Zemin Kat 34776
Ümraniye / İSTANBUL/TÜRKİYE
+90 (216) 540 30 20
info@satelcom.com.tr www.satelcom.com.tr