

### Part Number: STFD-90-400W

Frequency: 1.6 - 30 MHz | Power Rating: 400 Watt | Connector: N (Female)

## **OVERVEIW**

**SATELCOM's HF Folded Dipole Antenna** has a flat frequency response with no ripple on VSWR. Due to this frequency response, it can work at high performance over the entire HF band without need for any coupler or tunner circuit. Folded Dipole antennas can be installed very fast as flat-top or inverted-Vee due to their structure. They offer NVIS and long-range propagation, depending upon the mast configuration.

Besides its transmission performance, it offers a superior signal / noise ratio performance with folded dipole structure. In this way, it is not affected by background noise and provides excellent signal reception.

## **KEY FEATURES**

- ✓ HF Broadband Antenna,
- ✓ Operate 1.6-30 Mhz with < 2:1 SWR,</p>
- 50 Ω Input Impedance,
- ✓ 400W power handling capability,
- ✓ Working temperature -40°C / +55 °C,
- ✓ Temperature, salt, ice, sun irradiation resistance in accordance with MIL-STD 810G
- ✓ Wind max resistance 200 km/h,
- ✓ Possible to use in NVIS or Long-range Propagation,

✓ Installation possibility at different heights and angles like Inverted Vee, Flat Top and Sloper



#### Disclaimer: All images are for reference purposes only

	- · · · · ·
Electrical	Specifications

Part Number	STFD-90-400W	
<b>Frequency</b>	1.6 – 30 MHz	
Input Power	400 Watt	
VSWR/Return loss	1.6 -30 MHz <2 : 1	
Input Impedance	50 Ω	
Mechanical Specifications		
Connector	N (Female)	
Dimensions Double Unit (HxW)	0.46 x 27.4 m	
Deployment Time	2 People - 5 Minutes	
Weight	< 10 kg	
Installation Height	NVIS 4 mt Flat Top Long Range 8 mt Apex Inverted Vee	
Environmental Specifications		
Temperature Range	-40 to / + 55 °C	
Wind Resistance	200 km/h	

Revised | January 22 2021 (V4)

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.



SATELCOM TELEKOMÜNİKASYON BİLGİ VE İLETİŞİM TEKNOLOJİLERİ İTHALAT İHRACAT SANAYİ A.Ş. BÜDOTEK Teknopark, Dudullu OSB Mah. Des 2.Cad. No:8/25 Zemin Kat 34776 Ümraniye/İSTANBUL/TÜRKİYE +90 (216) 540 30 20 info@satelcom.com.tr www.satelcom.com.tr


ELECTRONIC | INVESTMENTS



Part Number: STFD-90-400W

Technical Specifications (MIL-STD-810G)	
PVC Isolator	High UV Resistance
1:16 Balun	U PVC Insulated- Resistant to environmental conditions such as Wind / Dust / Moisture / UV
800 $\Omega$ Resistance	Non-Inductive-U PVC Insulated - Resistant to environmental conditions such as Wind / Dust / Moisture / UV
Kevlar Reinforced Cable	2.4 mm - Copper - Resistant to environmental conditions such as Wind / Dust / Moisture / UV
Mount	Stainless - Resistant to environmental conditions such as Wind / Dust / Moisture / UV
Carry Bag	Mildew and Water resistant / Carrying capacity up to 70kg (Except MIL-STD-810G)

### Drawing

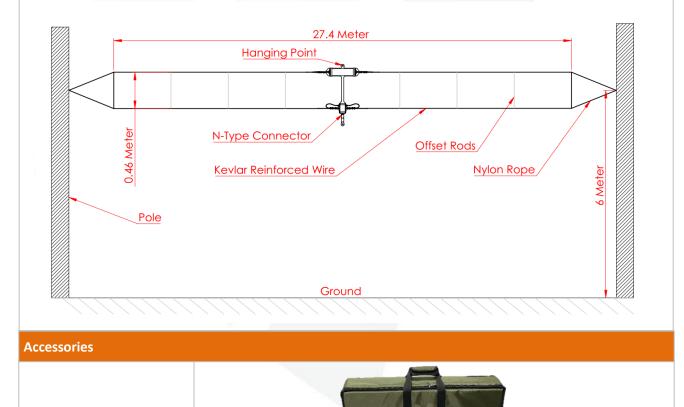



Disclaimer: All images are for reference purposes only

#### Revised | January 22 2021 (V4)

**Important** Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.




SATELCOM TELEKOMÜNİKASYON BİLGİ VE İLETİŞİM TEKNOLOJİLERİ İTHALAT İHRACAT SANAYİ A.Ş. BÜDOTEK Teknopark, Dudullu OSB Mah. Des 2.Cad. No:8/25 Zemin Kat 34776 Ümraniye/İSTANBUL/TÜRKİYE +90 (216) 540 30 20 info@satelcom.com.tr www.satelcom.com.tr





## Part Number: STFD-90-400W

### **Performance Measurements**

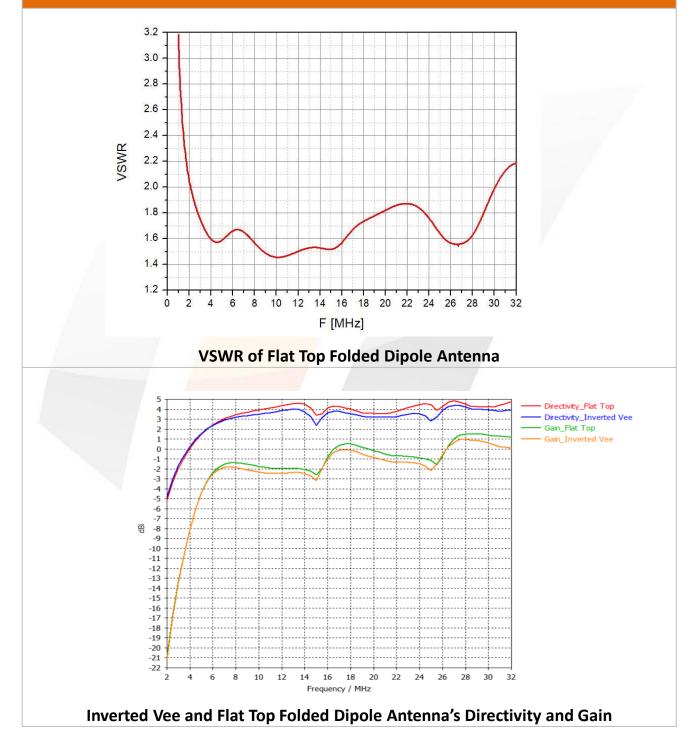

#### Disclaimer: All images are for reference purposes only

Revised | January 22 2021 (V4)

**Important** Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.




SATELCOM TELEKOMÜNİKASYON BİLGİ VE İLETİŞİM TEKNOLOJİLERİ İTHALAT İHRACAT SANAYİ A.Ş. BÜDOTEK Teknopark, Dudullu OSB Mah. Des 2.Cad. No:8/25 Zemin Kat 34776 Ümraniye/İSTANBUL/TÜRKİYE +90 (216) 540 30 20 info@satelcom.com.tr www.satelcom.com.tr

ELECTRONIC | INVESTMENTS DMY Group Company



### **Performance Measurements**

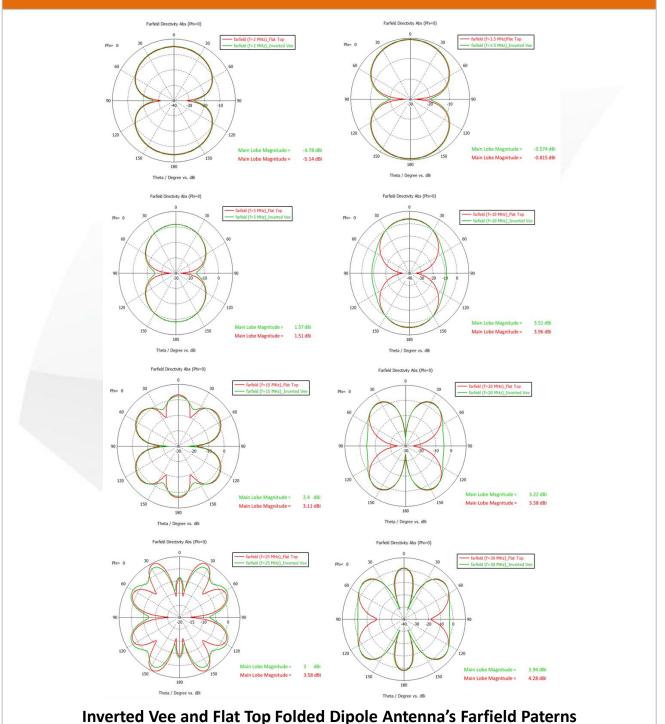

#### Disclaimer: All images are for reference purposes only

Revised | January 22 2021 (V4)

**Important** Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.



SATELCOM TELEKOMÜNİKASYON BİLGİ VE İLETİŞİM TEKNOLOJİLERİ İTHALAT İHRACAT SANAYİ A.Ş. BÜDOTEK Teknopark, Dudullu OSB Mah. Des 2.Cad. No:8/25 Zemin Kat 34776 Ümraniye/İSTANBUL/TÜRKİYE +90 (216) 540 30 20 info@satelcom.com.tr www.satelcom.com.tr

DIVERSION CONTRACTOR C

